

## NUVOLA 90

### Version

Ceiling 90 cm - Inox

### Collection

Design+

### EAN code

8034122353180

## KACL.798#41F

Remote under-roof motor 950

m<sup>3</sup>/h


### Collection

Accessoires

### EAN code

8034122709833

## ENERGY LABEL

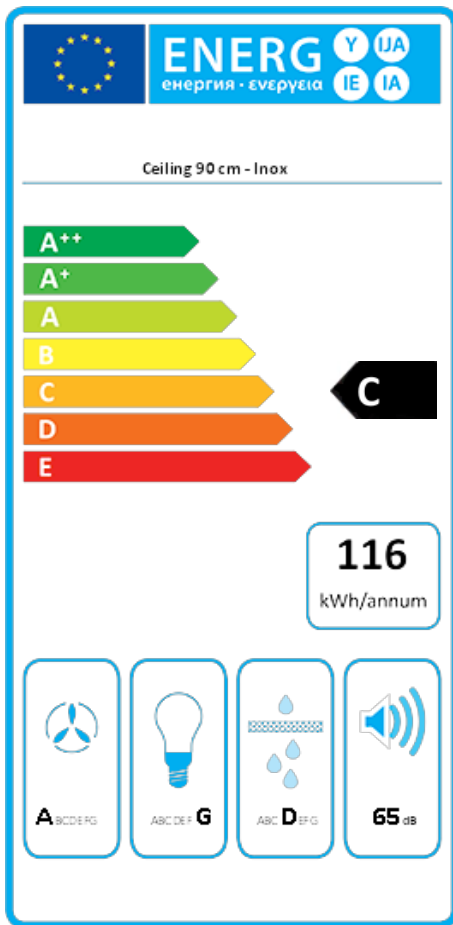

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	Ceiling 90 cm - Inox	
<b>AEC</b>	116,3	kWh/a
<b>ECC</b>	C	
<b>FDE</b>	29,5	
<b>FDEC</b>	A	
<b>LE</b>	1,2	
<b>LEC</b>	G	
<b>GFE</b>	65,1	
<b>GFEC</b>	D	
<b>Qmin</b>	360,0	m <sup>3</sup> /h
<b>Qmax</b>	630,0	m <sup>3</sup> /h
<b>Qboost</b>	880,0	m <sup>3</sup> /h
<b>SPEmin</b>	51	dBa
<b>SPEmax</b>	65	dBa
<b>SPEboost</b>	69	dBa
<b>PO</b>	-	W
<b>PS</b>	0,68	W
PI		
<b>F</b>	0,9	
<b>EEl</b>	73,9	
<b>Qbep</b>	441,0	m <sup>3</sup> /h
<b>Pbep</b>	434	Pa
<b>Qboost</b>	880,0	m <sup>3</sup> /h
<b>Wbep</b>	180,0	W
<b>WL</b>	78,00	W
<b>Emiddle</b>	91	lux
<b>Lwa-SPEmax</b>	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.